

Flachbandkabel Raster 1,0 mm

Leiteranzahl: 10, 12, 14, 16, 20, 24, 26, 34, 40, 44, 50


Max. Betriebsspannung: 300 V

Prüfspannung: 2.600 V (effektiv)

Zulässige Betriebstemperatur: bis +105 °C



RM
2,0

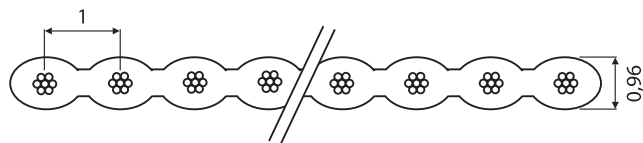

(Maße in mm)

Flachbandkabel AWG 28 PVC, RAL 7035 mit farbiger Randader (UL-Style 2651/CSA)		
Leiteranzahl	VE	
10	Rolle (76,2 m)	FK10010-76.2M
12	Rolle (76,2 m)	FK10012-76.2M
14	Rolle (76,2 m)	FK10014-76.2M
16	Rolle (76,2 m)	FK10016-76.2M
20	Rolle (76,2 m)	FK10020-76.2M
24	Rolle (76,2 m)	FK10024-76.2M
26	Rolle (76,2 m)	FK10026-76.2M
34	Rolle (76,2 m)	FK10034-76.2M
40	Rolle (76,2 m)	FK10040-76.2M
44	Rolle (76,2 m)	FK10044-76.2M
50	Rolle (76,2 m)	FK10050-76.2M