

Product data sheet

Automation technology - sensors and actuators




Product description	Connecting Cables Connecting cable, Contacts: 4/3, unshielded, moulded on cable, IP68, PUR black, 3 x 0.34 mm ² , 2 m
Area	Connecting Cables series 765
Part no.	77 9829 3430 50003-0200


Illustration




Pin assignment plans



Scale drawing

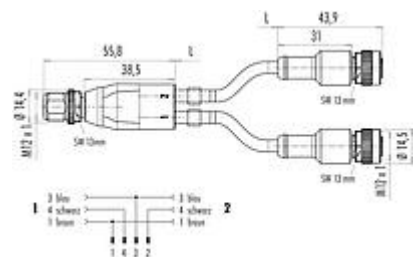

Contact arrangement (Plug-in side)

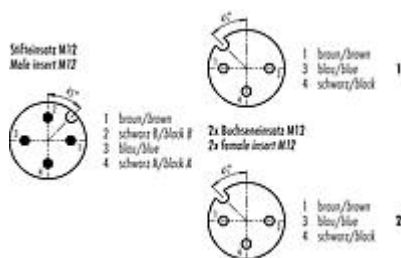

Technical data

General features

Part no.	77 9829 3430 50003-0200
	Alternative part no.: 79 5200 20 04
Notice	Please note that, due to the change from the old to the new order number, there may be deviations in the technical specifications. For questions about product details, please use the 'Contact Customer Service' form on the right.
Connector design	Connecting cable
Cable length	2 m
Version	Connection cable
Connector locking system	screw
Termination	moulded on cable
Degree of protection	IP68
Cross-sectional area	0.34 mm ² / AWG 22
Temperature range from/to	-25 °C / 85 °C

Product data sheet

Automation technology - sensors and actuators



Product description	Connecting Cables Connecting cable, Contacts: 4/3, unshielded, moulded on cable, IP68, PUR black, 3 x 0.34 mm ² , 2 m
Area	Connecting Cables series 765
Part no.	77 9829 3430 50003-0200

Mechanical operation	> 100 Mating cycles
Weight (g)	59.00
Customs tariff number	85444290

Electrical parameters

Rated voltage	250 V
Rated impulse voltage	2500 V
Rated current (40 °C)	4.0 A
Pollution degree	3
Overvoltage category	II
Insulating material group	II
EMC compliance	unshielded

Material

Housing material	PUR
Contact body material	PUR
Contact material	CuZn (brass) / CuSn (bronze)
Contact plating	Au (gold)
Locking material	Zinc die-cast nickel-plated
REACH SVHC	None (No pollutants)
SCIP number	SCIP-number not available

Classifications

eCl@ss 11.1	27-06-03-11
ETIM 7.0	EC001855

Declarations of conformity

Low Voltage Directive	2014/35/EU (EN 60204-1:2018;EN 60529:1991)
RoHS Directive	2011/65/EU (EN 50581:2012)

Cable data - Structure of the cable

Cable diameter	4.3 mm
Cross section	3 x 0.34 mm ²
Sheath material	PUR
Single-lead insulation	PP9Y halogen-free
Single-lead structure	43 x 0.10 mm
Cable color	black

Product data sheet

Automation technology - sensors and actuators



Product description	Connecting Cables Connecting cable, Contacts: 4/3, unshielded, moulded on cable, IP68, PUR black, 3 x 0.34 mm ² , 2 m
Area	Connecting Cables series 765
Part no.	77 9829 3430 50003-0200

Cable data - Electrical properties

Conductor resistance	60 Ω/Km (20°C)
----------------------	----------------

Cable data - Mechanical properties

Bending radius, fixed cable	≥ 5 x Ø
Bending radius, moving cable	≥ 10 x Ø
Bending cycles	> 5 million
Permitted acceleration	≥ 5 m/s ²
Travel distance, horizontal	≥ 5 m
Travel distance, vertical	≥ 5 m
Travel speed	≤ 200 m/min

Cable data - Thermal properties

Temperature range cable in move from/to	-25 °C / 80 °C
Temperature range cable fixed from/to	-50 °C / 80 °C

Cable data - Other features

Halogen free	yes
--------------	-----

Product description	Connecting Cables Connecting cable, Contacts: 4/3, unshielded, moulded on cable, IP68, PUR black, 3 x 0.34 mm², 2 m
Area Part no.	Connecting Cables series 765 77 9829 3430 50003-0200

Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 60 cNm).